

# SelectF Fiberglass Panel Filters

## FEATURES

- Durable Kraft board channel frame
- Environmentally friendly
- Available in 1"
- Max operating temp: 150°F
- Made in the USA



## SELECTF CONSTRUCTION & APPLICATIONS



Close-up of fiberglass media



Close-up of channel frame


MANN+HUMMEL's SelectF air filters are cost-effective and efficient disposable panel filters. These filters were created specifically for commercial and industrial applications requiring a light-medium workload. The SelectF features a durable construction Kraft board channel frame. These easy-to-install filters are environmentally friendly and made in the USA.

MANN+HUMMEL offers these disposable panel filters with fiberglass media in a moisture-resistant, Kraft board channel frame. The SelectF is available in one inch depths as well as custom sizes. The metal-free design allows for easy installation and environmentally friendly disposal.

The SelectF air filters should be used in applications that require light-medium duty filtration and should follow a change-out schedule of every 30 days. Applications that would benefit from the SelectF air filters include schools, hotels, commercial office buildings, hospitals, pharmaceutical plants,

laboratories, and other facilities. The SelectF panel filters were engineered to protect your HVAC equipment in light-medium applications.

## TECHNICAL DATA

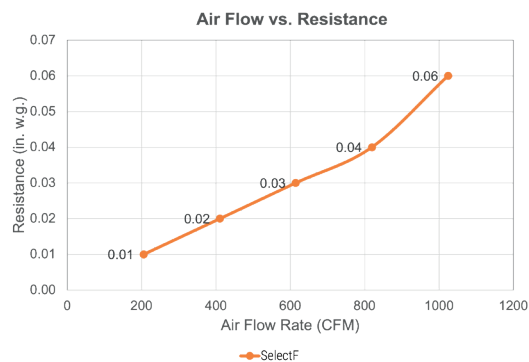

\*Based on 1" depth

**SELECTF PANEL FILTERS  
PERFORMANCE DATA**

Nominal Depth	Nominal Size (WxHxD)	Actual Size (in.)		Depth	Air Flow @ Capacity (CFM)	Resistance @ Capacity (in. w.g.)	Total Media Area (sq. ft.)
		Width	Height				
1"	12x12x1	11.75	11.75	0.75	300	0.05	0.92
	12x18x1	11.75	17.75		450		1.40
	12x20x1	11.75	19.75		500		1.56
	12x24x1	11.75	23.75		600		1.88
	12x25x1	11.75	24.75		625		1.96
	14x14x1	13.75	13.75		408		1.27
	14x18x1	13.75	17.75		525		1.64
	14x20x1	13.75	19.75		583		1.83
	15x20x1	14.75	19.75		625		1.96
	16x16x1	15.75	15.75		533		1.67
	16x18x1	15.75	17.75		600		1.88
	16x20x1	15.75	19.75		667		2.10
	16x24x1	15.75	23.75		800		2.53
	16x25x1	15.75	24.75		833		2.64
	18x18x1	17.75	17.75		675		2.13
	18x20x1	17.75	19.75		750		2.37
	20x20x1	19.75	19.75		833		2.64
	20x24x1	19.75	23.75		1000		3.18
	20x25x1	19.75	24.75		1042		3.32
	20x30x1	19.75	29.75		1250		4.00

- Notes:
- 1" deep filters are rated at 300 fpm.
  - Performance data is based on ASHRAE Test Standards 52.2 - Appendix J-2017.
  - More sizes are available. Please contact customer service for a full list of sizes.

**LOCAL REPRESENTATIVE**

MANN+HUMMEL is committed to continual product development - all descriptions, specifications and performance data are subject to change without notice. MANN+HUMMEL products are manufactured to exacting criteria - there can be a ±5% variance in filter performance.

