

SelectF Fiberglass Panel Filters

FEATURES

- Durable Kraft board channel frame
- Environmentally friendly
- Available in 1"
- Max operating temp: 150°F
- Made in the USA



SELECTF CONSTRUCTION & APPLICATIONS



Close-up of fiberglass media



Close-up of channel frame


MANN+HUMMEL's SelectF air filters are cost-effective and efficient disposable panel filters. These filters were created specifically for commercial and industrial applications requiring a light-medium workload. The SelectF features a durable construction Kraft board channel frame. These easy-to-install filters are environmentally friendly and made in the USA.

MANN+HUMMEL offers these disposable panel filters with fiberglass media in a moisture-resistant, Kraft board channel frame. All SelectF filters are one inch deep. The metal-free design allows for easy installation and environmentally friendly disposal.

The SelectF air filters should be used in applications that require light-medium duty filtration and should follow a change-out schedule of every 30 days. Applications that would benefit from the SelectF air filters include schools, hotels, commercial

office buildings, hospitals, pharmaceutical plants, laboratories, and other facilities. The SelectF panel filters were engineered to protect your HVAC equipment in light-medium applications.

TECHNICAL DATA

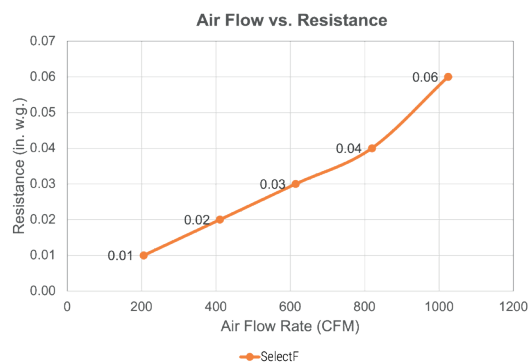

*Based on 1" depth

**SELECTF PANEL FILTERS
PERFORMANCE DATA**

Nominal Depth	Nominal Size (WxHxD)	Actual Size (in.)		Depth	Air Flow @ Capacity (CFM)	Resistance @ Capacity (in. w.g.)	Total Media Area (sq. ft.)
		Width	Height				
1"	12x24x1	11.75	23.75	0.75	600	0.05	1.88
	14x18x1	13.75	17.75		525		1.64
	14x20x1	13.75	19.75		583		1.83
	14x24x1	13.75	23.75		700		2.14
	14x25x1	13.75	24.75		729		2.23
	16x20x1	15.75	19.75		667		2.10
	16x25x1	15.75	24.75		833		2.64
	18x18x1	17.75	17.75		675		2.13
	18x20x1	17.75	19.75		750		2.37
	18x24x1	17.75	23.75		900		2.79
	20x20x1	19.75	19.75		833		2.64
	20x24x1	19.75	23.75		1000		3.18
	20x25x1	19.75	24.75		1042		3.32

- Notes:
- 1" deep filters are rated at 300 fpm.
 - Performance data is based on ASHRAE 52.2-2017.
 - Additional sizes are available in our SelectFDC product line.

LOCAL REPRESENTATIVE

MANN+HUMMEL is committed to continual product development – all descriptions, specifications and performance data are subject to change without notice. MANN+HUMMEL products are manufactured to exacting criteria – there can be a ±5% variance in filter performance.