


# Tri-Guard™ Overspray Arrestor

## FEATURES

- Synthetic arrestor available in pads and rolls
- Quality-controlled manufacturing facility
- Average efficiency on paint 99.5%
- Available in a wide range of standard and special sizes
- Initial resistance = 0.08 "W.G. @ 148 FPM

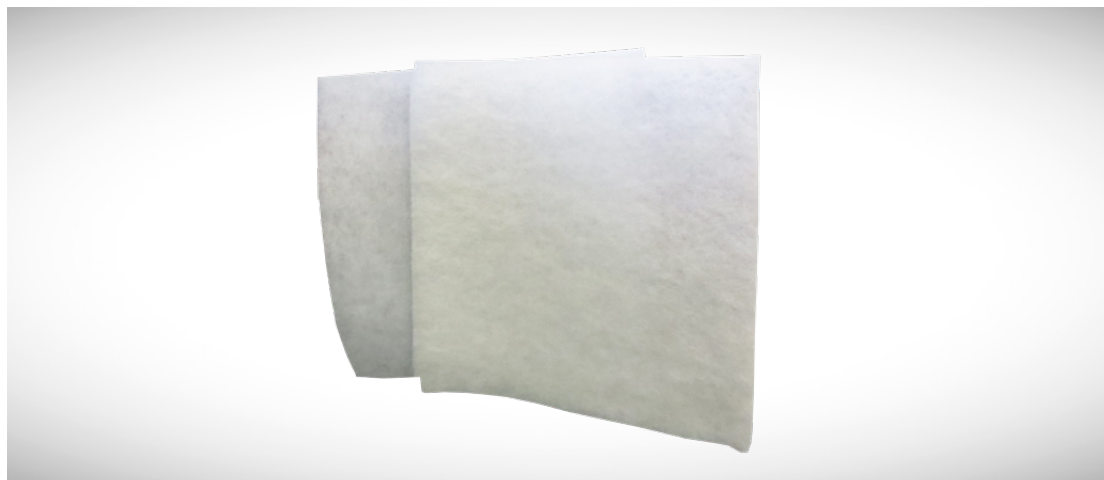

## TRI-GUARD™ - SPRAY BOOTH SERIES

Tri-Dim's Tri-Guard filters are designed for use in the demanding application of paint booth exhaust systems.

The Tri-Guard is a one inch, multidenier synthetic media with a high holding capacity and high removal efficiencies. Tests have documented an average removal efficiency of a 99.5% on paint and a hold

capacity of 1875 grams. That is over four pounds of paint held in a single 20 x 20" pad.

These filters are manufactured in a quality-controlled manufacturing facility to ensure the highest quality product available. Tri-Guard is available in cut pads and bulk rolls, with a wide range of standard and special sizes.

# Tri-Guard™


## Technical Specification

### SPECIFICATIONS

<b>Product</b>	<b>Tri-Guard</b>
<b>Media</b>	Dual-denier synthetic
<b>Media depth</b>	1" (25 mm)
<b>Resistance to air flow</b>	0.08 "W.G. @ 148 FPM (20 Pa @ 0.75 m/sec)
<b>Final resistance</b>	1.0"W.G. (249 Pa)
<b>Average paint arrestance efficiency</b>	99.5%
<b>Paint holding capacity</b>	1875 grams
<b>Availability</b>	Cut pads or bulk rolls

### RESISTANCE

vs. Air Flow

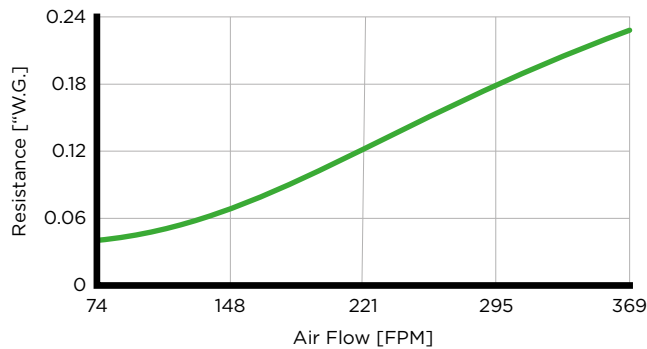

Tri-Dim Filter Corporation is committed to continual product development - all descriptions, specifications and performance data are subject to change without notice. Tri-Dim products are manufactured to exacting criteria - there can be a  $\pm 5\%$  variance in filter performance.

### LOCAL REPRESENTATIVE