

Airroll Select Glass Automatic RFD

Product Range



Features




Applications



Filter Class

G

Coarse

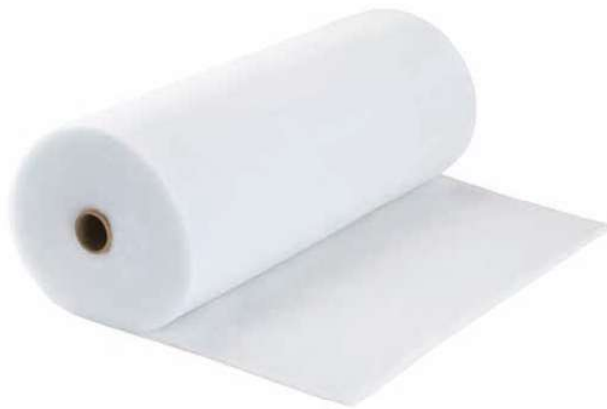

KEY FACTS

- Compatible with Delbag automatic roll filter hardware
- High dust holding capacity
- Wound for standard or reverse flow
- Odor free

DESIGN

Continuously-spun glass fiber media, tension wound onto a cardboard tube.

APPLICATIONS

Replacement filter roll for installation in Delbag systems.

Airroll Select Glass Automatic RFD

PERFORMANCE DATA

| Article No. | Filter Class | | Dimensions | Pressure Drop |
|--------------|--------------|--------|-------------------|---------------|
| | ISO 16890 | EN 779 | | |
| | | | mm | Pa |
| 800122027888 | Coarse 70% | G3 | 810 x 20000 x 60 | 48 |
| 800122027889 | Coarse 70% | G3 | 1110 x 20000 x 60 | 48 |
| 800122027890 | Coarse 70% | G3 | 1410 x 20000 x 60 | 48 |
| 800122027891 | Coarse 70% | G3 | 1710 x 20000 x 60 | 48 |
| 800122027892 | Coarse 70% | G3 | 2010 x 20000 x 60 | 48 |

SPECIFICATION

| | | | |
|---------------------------------|------------|--|---|
| Recommended air velocity | 2.5 m/s | Rec. final pressure for efficient energy use acc. to EN 13053 | Lowest value of initial pressure drop + 50 Pa, or initial pressure drop x 3 |
| Heat resistance | Max. 80 °C | Moisture resistance | 80 % |
| Regenerable | No | Incinerable | No |