

Airmat Eco H2O Power

Product Range



Features




Applications



Filter Class

G

Coarse

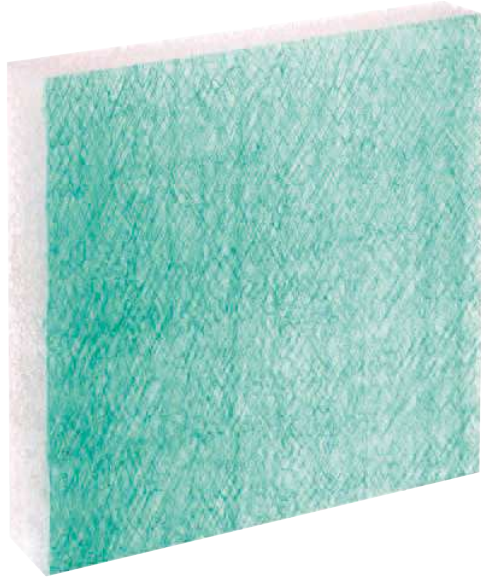

KEY FACTS

- Combined air filter and water coalescer
- Ideally suited to coastal applications
- High dust holding capacity of 3000 g/m² (SAE)

DESIGN

Disposable media of continuous glass fibers with progressive density coated with adhesive. The downstream side of the media is colored green to ensure correct installation.

APPLICATIONS

For use in industrial applications with rotating machinery like engines, gas turbines and smooth-flow compressors. Suitable for both land-based and offshore applications.

Airmat Eco

H2O Power

PERFORMANCE DATA

Article No.		Filter Class	Dimensions	Flow Rate	Pressure Drop
	ISO 16890	EN 779	mm	m ³ /h	Pa
800120010694	Coarse 40%	G3	610 x 610 x 100	3400	40
800120010689	Coarse 40%	G3	305 x 610 x 100	1700	40
800120012107	Coarse 40%	G3	305 x 305 x 100	850	40

*Products listed above do not include a holding frame. See Airhandling for more information on suitable pad holding frames.

SPECIFICATION

Recommended air velocity	2.5 m/s	Recommended final pressure drop	250 Pa
Heat resistance	80 °C	Moisture resistance	100 % rel. humidity
Regenerable	No	Incinerable	Yes