

Carboactiv Pocket Duosorb Eco

Product Range



Features




Applications



Filter Class

M

ePM10

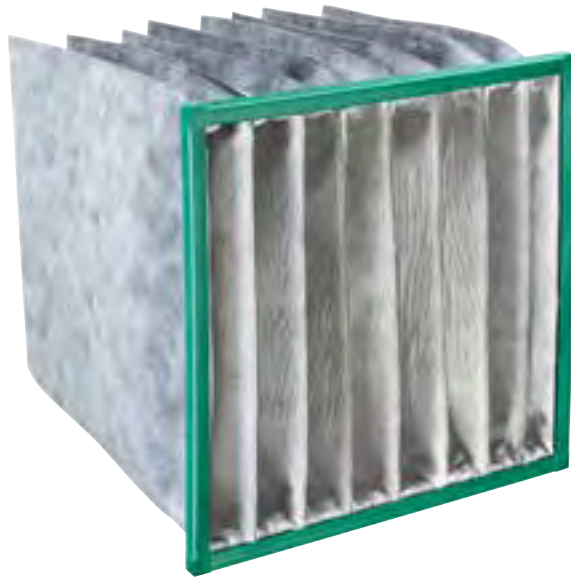

KEY FACTS

- Particle filtration and gas adsorption in one filter element
- Improvement of indoor air quality
- Ideal for eliminating odors
- Low pressure drop

DESIGN

Multi-layered synthetic and carbon media sewn together to form pockets and assembled in a robust frame.

APPLICATIONS

For use in public buildings or other places where people gather to improve indoor air quality and protect against sick building syndrome.

Carboactiv Pocket Duosorb Eco

PERFORMANCE DATA

| Article No. | Filter Class | | Dimensions | Pockets | Flow Rate | Pressure Drop |
|--------------|--------------|--------|-----------------|---------|-------------------|---------------|
| | ISO 16890 | EN 779 | mm | | m ³ /h | Pa |
| 800658029868 | ePM10 75% | M6 | 592 x 592 x 635 | 8 | 3400 | 70 |

SPECIFICATION

| | | | |
|------------------------|----------------------|--|--|
| Heat resistance | < 30 °C (Peak 50 °C) | Rec. final pressure for efficient energy use acc. to EN 13053 | Lowest value of initial pressure drop + 100 Pa, or initial pressure drop x 3 |
| Regenerable | No | Moisture resistance | < 60 % (Max. < 90 %) |
| Incinerable | No | | |

OPTIONS

| | |
|---------------|---------------------------|
| Gasket | Flat gasket, 1 or 2 sides |
|---------------|---------------------------|