


# Airmat Eco H2O Power

---

## Product Range



---

## Features



---

## Applications




---

## Filter Class

G

Coarse

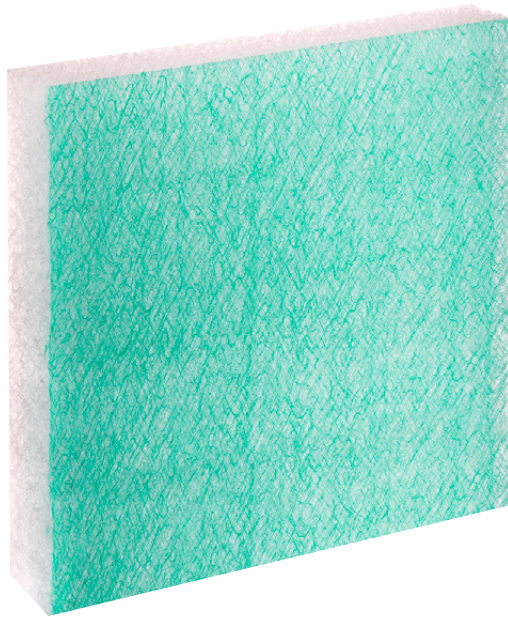

## KEY FACTS

- Combined air filter and water coalescer
- Ideally suited to coastal applications
- High dust holding capacity of 3000 g/m<sup>2</sup> (SAE)

## DESIGN

Disposable media of continuous glass fibers with progressive density coated with adhesive. The downstream side of the media is colored green to ensure correct installation.

## APPLICATIONS

For use in industrial applications with rotating machinery like engines, gas turbines and smooth-flow compressors. Suitable for both land-based and offshore applications.

# Airmat Eco

## H2O Power

### PERFORMANCE DATA

Article No.	Filter Class		Dimensions	Flow Rate	Pressure Drop
	ISO 16890	EN 779	mm	m <sup>3</sup> /h	Pa
800120010694	Coarse 60%	G3	610 x 610 x 100	3400	40
800120010689	Coarse 60%	G3	305 x 610 x 100	1700	40
800120012107	Coarse 60%	G3	305 x 305 x 100	850	40

\*Products listed above do not include a holding frame. See Airhandling for more information on suitable pad holding frames.

### SPECIFICATION

<b>Recommended air velocity</b>	2.5 m/s	<b>Recommended final pressure drop</b>	250 Pa
<b>Heat resistance</b>	80 °C	<b>Moisture resistance</b>	100 % rel. humidity
<b>Regenerable</b>	No	<b>Incinerable</b>	Yes