


Airmat Pro H2O Power

Product Range



Features




Applications



Filter Class

G

Coarse

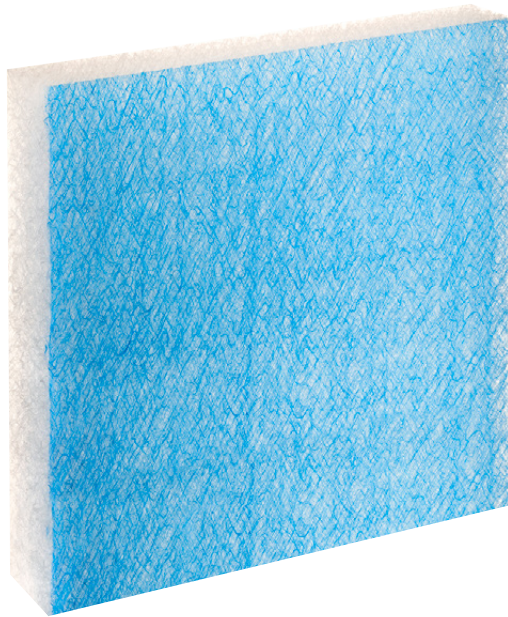

KEY FACTS

- Combined air filter and water coalescer
- Ideally suited to coastal applications
- High dust holding capacity of 5340 g/m² (SAE)

DESIGN

Disposable media of continuous glass fibers with progressive density coated with adhesive. The downstream side of the media is colored blue to ensure correct installation.

APPLICATIONS

For use in industrial applications with rotating machinery like engines, gas turbines and smooth-flow compressors. Suitable for both land-based and offshore applications.

Airmat Pro

H2O Power

PERFORMANCE DATA

| Article No. | Filter Class | | Dimensions | Flow Rate | Pressure Drop |
|--------------|--------------|--------|-----------------|-----------|---------------|
| | ISO 16890 | EN 779 | | | |
| 800163024418 | Coarse 60% | G4 | 610 x 610 x 125 | 3400 | 105 |

SPECIFICATION

| | | | |
|---------------------------------|---------|--|---------------------|
| Recommended air velocity | 2.5 m/s | Recommended final pressure drop | 250 Pa |
| Heat resistance | 80 °C | Moisture resistance | 100 % rel. humidity |
| Regenerable | No | Incinerable | Yes |